

iW1817 Product Brief

Off-Line Digital Green-Mode PWM Controller Integrated with Power BJT




1.0 Features

- Tight constant voltage and constant current regulation with **PrimAccurate™** primary-side-only feedback
- **AccuSwitch™** technology with integrated 800V bipolar junction transistor (BJT)
- Primary-side sensing technology eliminates opto-isolators and simplifies design
- DIP package for higher power and for single-sided board
- Adaptively controlled soft start-up enables fast and smooth start-up for a wide range of output voltage (5V, 12V and above) and capacitive loads up to 6,000 μ F
- 64kHz PWM switching frequency
- No-load power consumption < 30mW at 230V_{AC} with typical 5V application circuit
- Fast dynamic load response for both one-time and repetitive load transients
- Adaptive multi-mode PWM/PFM control improves efficiency
- Quasi-resonant operation for highest overall efficiency
- **EZ-EMI®** design easily meets global EMI standards
- No external compensation components required
- Built-in single-point fault protections against output short circuit, output over-voltage, and current-sense-resistor short-circuit faults
- Built-in over-temperature protection (OTP)
- No audible noise over entire operating range

2.0 Description

The iW1817 is a high performance AC/DC power supply control device which uses digital control technology to build peak-current mode PWM flyback power supplies. This device includes an internal power BJT and operates in quasi-resonant mode to provide high efficiency along with a number of key built-in protection features while minimizing the external component count, simplifying EMI design, and lowering the total bill of material cost. The iW1817 uses iWatt's advanced PrimAccurate™ primary-side sensing technology to eliminate the need for secondary feedback circuitry, while achieving excellent line and load regulation. It also eliminates the need for loop compensation components while maintaining stability in all operating conditions. The pulse-by-pulse waveform analysis allows for fast dynamic load response for both one-time and repetitive load transients. The built-in power limit function enables optimized transformer design for a wide input voltage range.



iWatt's innovative proprietary technology ensures that power supplies built with the iW1817 can achieve highest average efficiency, lowest standby power consumption, and fast smooth startup with a wide range of output voltage (5V, 12V and above) and capacitive loads (from 330 μ F to 6,000 μ F).

3.0 Applications

- Low-power AC/DC power supply for smart meters, motor control, home appliances, networking devices and industrial applications
- Linear AC/DC replacement

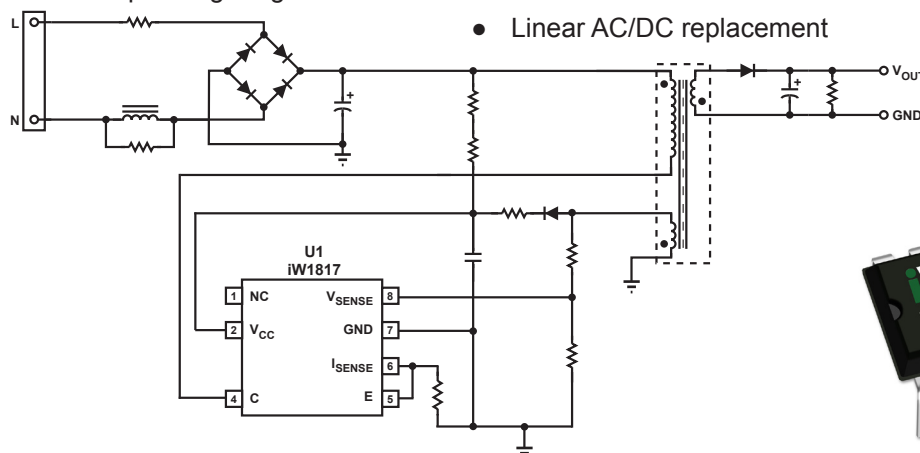


Figure 3.1: iW1817 Typical Application Circuit

WARNING:

The iW1817 is intended for high voltage AC/DC offline applications. Contact with live high voltage offline circuits or improper use of components may cause lethal or life threatening injuries or property damage. Only qualified professionals with safety training and proper precaution should operate with high voltage offline circuits.

iW1817 Product Brief

Off-Line Digital Green-Mode PWM Controller Integrated with Power BJT



iW1817 Output Power Table at Universal Input ($85V_{AC}$ – $264V_{AC}$)

Condition	Open Frame ²
Output Power (W)	7.0

Notes:

1. Maximum practical continuous output power measured at open frame ambient temperature of 50°C and device pins/package temperatures of $\leq 100^{\circ}\text{C}$ while minimum bulk capacitor voltage is kept above $90V_{DC}$ and no special heatsinking is used (test unit is placed in a non-ventilated environment)
2. The output power capability can vary depending on the power supply system designs and operating conditions.

4.0 Pinout Description

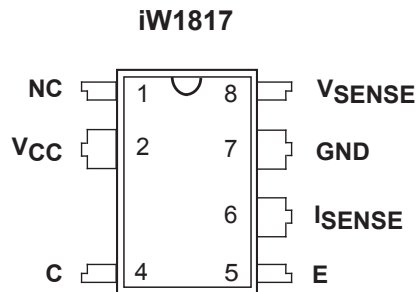


Figure 4.1: 7-Lead PDIP Package

Pin #	Name	Type	Pin Description
1	NC	No Conneciton	No connection.
2	V_{CC}	Power Input	Power supply for control logic.
4	C	BJT Collector	Collector of internal BJT.
5	E	BJT Emitter	Emitter of internal BJT (pin 5 and pin 6 must be shorted externally on the PCB).
6	I_{SENSE}	Analog Input	Primary current sense. Used for cycle-by-cycle peak current control and current limit.
7	GND	Ground	Ground.
8	V_{SENSE}	Analog Input	Auxiliary voltage sense (used for primary-side regulation).

iW1817 Product Brief

Off-Line Digital Green-Mode PWM Controller Integrated with Power BJT



5.0 Absolute Maximum Ratings

Absolute maximum ratings are the parameter values or ranges which can cause permanent damage if exceeded. For maximum safe operating conditions, refer to Electrical Characteristics in Section 7.0. ($T_A = 25^\circ\text{C}$, unless otherwise noted). Proper design precautions must be made to ensure that the internal die junction temperature of the iW1817 does not exceed 150°C . Otherwise permanent damage to the device may occur.

Parameter	Symbol	Value	Units
DC supply voltage range (pin 2, $I_{CC} = 20\text{mA}$ max)	V_{CC}	-0.3 to 18	V
Continuous DC supply current at V_{CC} pin ($V_{CC} = 15\text{V}$)	I_{CC}	20	mA
V_{SENSE} input (pin 8, $I_{V_{sense}} \leq 10\text{mA}$)		-0.7 to 4.0	V
I_{SENSE} input (pin 6)		-0.3 to 4.0	V
ESD rating per JEDEC JESD22-A114		2,000	V
Latch-up test per JEDEC 78		± 100	mA
Collector-Emitter breakdown voltage (Emitter and base shorted together; $I_C = 1\text{mA}$, $R_{EB} = 0\Omega$)	V_{CES}	800	V
Collector current ¹	I_C	1.5	A
Collector peak current ¹ ($t_p < 1\text{ms}$)	I_{CM}	3	A
Maximum junction temperature	T_{JMAX}	150	$^\circ\text{C}$
Storage temperature	T_{STG}	-55 to 150	$^\circ\text{C}$

Notes:

1. Limited by maximum junction temperature.




iW1817 Product Brief

Off-Line Digital Green-Mode PWM Controller Integrated with Power BJT



6.0 Physical Dimensions

7-Lead Plastic Dual In-Line (PDIP) Package



Symbol	Inches		Millimeters	
	MIN	MAX	MIN	MAX
A	0.135	0.145	3.429	3.683
B	0.015	0.021	0.381	0.533
B1	0.050	0.065	1.270	1.650
C	0.007	0.014	0.200	0.356
D	0.367	0.387	9.322	9.830
E	0.300	0.325	7.620	8.255
E1	0.240	0.260	6.096	6.604
e	0.1 BSC		2.54 BSC	
eA	0.332	0.392	8.433	9.957
L	0.120	0.140	3.048	3.556

Compliant to JEDEC Standard MS12F

Controlling dimensions are in inches; millimeter dimensions are for reference only

This product is RoHS compliant and Halide free.

Soldering Temperature Resistance:

[a] Package is IPC/JEDEC Std 020D Moisture Sensitivity Level 1

[b] Package exceeds JEDEC Std No. 22-A111 for Solder Immersion Resistance; package can withstand 10 s immersion < 270°C

Dimension D does not include mold flash, protrusions or gate burrs. Mold flash, protrusions or gate burrs shall not exceed 0.15 mm per end. Dimension E1 does not include interlead flash or protrusion. Interlead flash or protrusion shall not exceed 0.25 mm per side.

The package top may be smaller than the package bottom. Dimensions D and E1 are determined at the outermost extremes of the plastic body exclusive of mold flash, tie bar burrs, gate burrs and interlead flash, but including any mismatch between the top and bottom of the plastic body.

7.0 Ordering Information

Part Number	Package	Description
iW1817-00	PDIP-7	Tube ¹

Notes:

1. Minimum ordering quantity is 1,000.

iW1817 Product Brief

Off-Line Digital Green-Mode PWM Controller Integrated with Power BJT



Trademark Information

© 2013 iWatt Inc. All rights reserved. iWatt, the iWatt logo, BroadLED, EZ-EMI, Flickerless, and PrimAccurate are registered trademarks and AccuSwitch and Power Management Simplified Digitally are trademarks of iWatt Inc. All other trademarks are the property of their respective owners.

Contact Information

Web: <https://www.iwatt.com>

E-mail: info@iwatt.com

Phone: +1 (408) 374-4200

Fax: +1 (408) 341-0455

iWatt Inc.

675 Campbell Technology Parkway, Suite 150
Campbell, CA 95008

Disclaimer

iWatt reserves the right to make changes to its products and to discontinue products without notice. The applications information, schematic diagrams, and other reference information included herein is provided as a design aid only and are therefore provided as-is. iWatt makes no warranties with respect to this information and disclaims any implied warranties of merchantability or non-infringement of third-party intellectual property rights.

iWatt cannot assume responsibility for use of any circuitry other than circuitry entirely embodied in an iWatt product. No circuit patent licenses are implied.

Certain applications using semiconductor products may involve potential risks of death, personal injury, or severe property or environmental damage ("Critical Applications").

IWATT SEMICONDUCTOR PRODUCTS ARE NOT DESIGNED, INTENDED, AUTHORIZED, OR WARRANTED TO BE SUITABLE FOR USE IN LIFE-SUPPORT APPLICATIONS, DEVICES OR SYSTEMS, OR OTHER CRITICAL APPLICATIONS.

Inclusion of iWatt products in critical applications is understood to be fully at the risk of the customer. Questions concerning potential risk applications should be directed to iWatt Inc.

iWatt semiconductors are typically used in power supplies in which high voltages are present during operation. High-voltage safety precautions should be observed in design and operation to minimize the chance of injury.