


Dual Power MOSFET Module

VMM 1500-0075P

$V_{DSS} = 75\text{ V}$
 $I_{D25} = 1500\text{ A}$
 $R_{DS(on)} = 0.55\text{ m}\Omega$

Phaseleg Configuration

Preliminary data



| MOSFET T1 + T2 | | | |
|----------------|---|-----------------|---|
| Symbol | Conditions | Maximum Ratings | |
| V_{DSS} | $T_{VJ} = 25^{\circ}\text{C to } 150^{\circ}\text{C}$ | 75 | V |
| V_{GS} | | ± 20 | V |
| I_{D25} | $T_C = 25^{\circ}\text{C}$ ① | 1500 | A |
| I_{D80} | $T_C = 80^{\circ}\text{C}$ ① | 1200 | A |
| I_{F25} | (diode) $T_C = 25^{\circ}\text{C}$ ① | 1500 | A |
| I_{F80} | (diode) $T_C = 80^{\circ}\text{C}$ ① | 1100 | A |

Features

- Trench MOSFETs
 - low $R_{DS(on)}$
 - optimized intrinsic reverse diode
- package
 - low inductive current path
 - screw connection to high current main terminals
 - use of non interchangeable connectors for auxiliary terminals possible
 - Kelvin source terminals for easy drive
 - isolated DCB ceramic base plate

| Symbol | Conditions | Characteristic Values ($T_{VJ} = 25^{\circ}\text{C}$, unless otherwise specified) | | |
|---|--|--|------|-------------------|
| | | min. | typ. | max. |
| $R_{DS(on)}$ | $V_{GS} = 10\text{ V}; I_D = I_{D80}$ | | 0.55 | 0.8 m Ω |
| $V_{GS(th)}$ | $V_{DS} = 20\text{ V}; I_D = 10\text{ mA}$ | 2 | | 4 V |
| I_{DSS} | $V_{DS} = V_{DSS}; V_{GS} = 0\text{ V}; T_{VJ} = 25^{\circ}\text{C}$ $T_{VJ} = 125^{\circ}\text{C}$ | | 1.5 | 0.15 mA mA |
| I_{GSS} | $V_{GS} = \pm 20\text{ V}; V_{DS} = 0\text{ V}$ | | | 1.5 μA |
| Q_g Q_{gs} Q_{gd} | $V_{GS} = 10\text{ V}; V_{DS} = 60\text{ V}; I_D = 500\text{ A}$ | | 2480 | nC |
| | | | 330 | nC |
| | | | 940 | nC |
| $t_{d(on)}$ t_r $t_{d(off)}$ t_f | $V_{GS} = 10\text{ V}; V_{DS} = 30\text{ V};$ $I_D = 250\text{ A}; R_G = 1\ \Omega$ | | 60 | ns |
| | | | 170 | ns |
| | | | 320 | ns |
| | | | 200 | ns |
| V_F | (diode) $I_F = 750\text{ A}; V_{GS} = 0\text{ V}$ | | 1.2 | 1.6 V |
| t_{rr} | (diode) $I_F = 200\text{ A}; -di/dt = 1000\text{ A}/\mu\text{s}; V_{DS} = 30\text{ V}$ | | 90 | ns |
| R_{thJC} R_{thJS} | with heat transfer paste | | 0.12 | 0.06 K/W K/W |

① additional current limitation by external leads


IXYS reserves the right to change limits, test conditions and dimensions.

Module

| Symbol | Conditions | Maximum Ratings | |
|------------|--|-----------------|----|
| I_{RMS} | per main terminal | 500 | A |
| T_{VJ} | | -40...+175 | °C |
| T_{stg} | | -40...+125 | °C |
| V_{ISOL} | $I_{ISOL} \leq 1 \text{ mA}; 50/60 \text{ Hz}$ | 3600 | V~ |
| M_d | Mounting torque (M6) | 2.25 - 2.75 | Nm |
| | Terminal connection torque (M6) | 4.5 - 5.5 | Nm |

| Symbol | Conditions | Characteristic Values | | |
|--------|------------|-----------------------|------|------|
| | | min. | typ. | max. |
| Weight | | | 250 | g |

Dimensions in mm (1 mm = 0.0394")

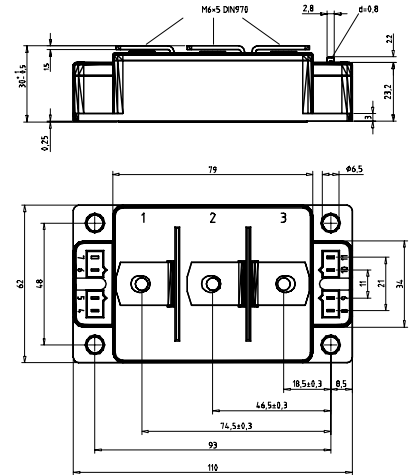

Optional accessories for modules

keyed twin plugs
(UL758, style 1385, CSA class 5851,
guide 460-1-1)

- Type ZY180L with wire length 350mm
– for pins 4 (yellow wire) and 5 (red wire)
– for pins 11 (yellow wire) and 10 (red wire)
- Type ZY180R with wire length 350mm
– for pins 7 (yellow wire) and 6 (red wire)
– for pins 8 (yellow wire) and 9 (red wire)