

**Terminal blocks**

to **Type 017**

- ASP025** page 47
- Type 007** page 89
- Type 026** page 129
- Type 077** page 89
- Type 107** page 90

to **Type 027**

- Type 007** page 89
- Type 026** page 129
- Type 077** page 89
- Type 107** page 90
- Type 137** page 91

**Note for Type 017 and Type 027**

Packaging for automated processing is available on demand. Please do not hesitate to contact us.

**Type 017**


Header, centerline 5 mm / 0.197 inches, vertical mounting, designed for THR, optional Tape on Reel packaging for automated processing, round contact pins 1.3 mm / 0.051 inches

**Technical Data**

	V / A	300 / 15
	V / A	300 / 15
		250 V / 4 kV / 10 A

Insulation co-ordination according to EN 60664-1			
Clearance and creepage distances	min. 3.7 mm		
Insulating material class	CTI 400		
Overvoltage category	III	III	II
Pollution degree	3	2	2
Rated voltage	250	500	500
Rated test voltage	2.5	4	2.5
Protection category according to IEC 60529	IP00		
Solder pin dimension	1 mm		
Recommended pc board hole dia.	Ø 1.3 mm		
Solder pin length	3.4 mm		
Pole size	2 - 24		
Colour	black		

Dimensions in mm 1 mm = 0.0394 in.

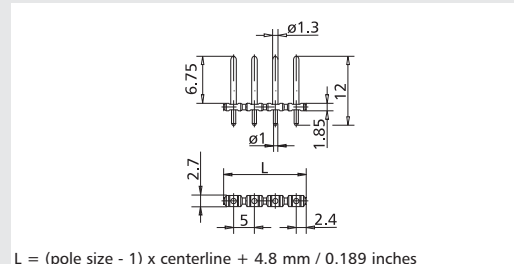

$L = (\text{pole size} - 1) \times \text{centerline} + 4.8 \text{ mm} / 0.189 \text{ inches}$

**Part numbers (P/N)**

(informations: page 110)

Complete the part number by adding the pole size.

**Type 017**

centerline 5 mm / 0.197 inches

P/N 310171

	02	03	04	05	06	07	08
	09	10	11	12	13	14	15
	17	18	19	20	21	22	23
	24						

**Type 027**


Header, centerline 5 mm / 0.197 inches, vertical mounting, designed for THR, optional Tape on Reel packaging for automated processing, round contact pins 1.3 mm / 0.051 inches

**Technical Data**

	V / A	300 / 15
	V / A	300 / 15
		250 V / 4 kV / 10 A

Insulation co-ordination according to EN 60664-1			
Clearance and creepage distances	min. 3.7 mm		
Insulating material class	CTI 400		
Overvoltage category	III	III	II
Pollution degree	3	2	2
Rated voltage	250	500	500
Rated test voltage	2.5	4	2.5
Protection category according to IEC 60529	IP00		
Solder pin dimension	1 mm		
Recommended pc board hole dia.	Ø 1.3 mm		
Solder pin length	3.4 mm		
Pole size	2 - 24		
Colour	black		

Dimensions in mm 1 mm = 0.0394 in.

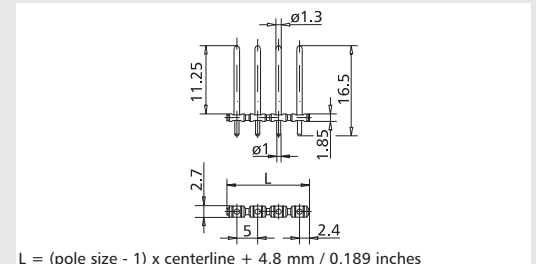

$L = (\text{pole size} - 1) \times \text{centerline} + 4.8 \text{ mm} / 0.189 \text{ inches}$

**Part numbers (P/N)**

(informations: page 110)

Complete the part number by adding the pole size.

**Type 027**

centerline 5 mm / 0.197 inches

P/N 310271

	02	03	04	05	06	07	08
	09	10	11	12	13	14	15
	17	18	19	20	21	22	23
	24						

Standard pole sizes  
 Available on demand. Minimum order quantity 5000 pieces per item.

Standard pole sizes  
 Available on demand. Minimum order quantity 5000 pieces per item.