


Thick Film, Dual-in-Line Resistor Networks



FEATURES

- 14, 16 or 20 terminal package
- Isolated, bussed or TTL-terminator circuits
- Molded case construction
- Thick film resistive elements
- Reflow solderable
- Compatible with automatic surface mounting equipment
- Reduces total assembly costs
- For wave flow soldering contact factory
- Lead (Pb)-free version is RoHS compliant

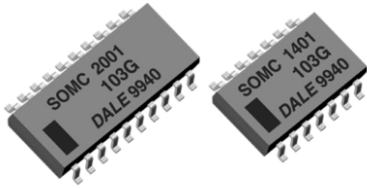

RoHS*
COMPLIANT

STANDARD ELECTRICAL SPECIFICATIONS

| GLOBAL MODEL | ELEMENT $P_{70^\circ C}$ W | PACKAGE POWER RATING $P_{70^\circ C}$ W | | | CIRCUIT | LIMITING ELEMENT VOLTAGE MAX. V \equiv | TEMPERATURE COEFFICIENT ¹⁾ ppm/ $^\circ C$ | TOL. % | RESISTANCE RANGE Ω | E-SERIES |
|--------------|----------------------------|---|----------------------|----------------------|----------------|--|---|-------------------------------|---------------------------|----------|
| | | 14 | 16 | 20 | | | | | | |
| SOMC | 0.08 0.16 0.08 | 1.05 1.125 1.05 | 1.20 1.28 1.20 | 1.52 1.60 1.52 | 01 03 05 | 50 | 100 | 1, 2, 5 1, 2, 5 1, 2, 5 | 10R - 1M | 24 |

- ¹⁾ Temperature Range: - 55 $^\circ C$ to + 125 $^\circ C$
- Power rating depends on the max. temperature at the solder point, the component placement density and the substrate material
 - Jumper: Zero-Ohm-Resistor on request (100 m Ω)
 - Packaging: according to EIA; see appropriate catalog or web page

TECHNICAL SPECIFICATIONS

| PARAMETER | UNIT | 01 CIRCUIT | 03 CIRCUIT | 05 CIRCUIT |
|--|-------------------------|--------------------|------------|------------|
| Rated Dissipation at 70 $^\circ C$ per Element | W | 0.08 | 0.16 | 0.08 |
| Limiting Element Voltage ²⁾ | V \equiv | 50 | | |
| Voltage Coefficient | ppm/V | < 50 | | |
| Insulation Voltage (1min) | V _{dc/ac} peak | 200 | | |
| Category Temperature Range | $^\circ C$ | - 55/+ 150 | | |
| Insulation Resistance | Ω | > 10 ¹⁰ | | |
| TC Tracking (- 55 $^\circ C$ to + 125 $^\circ C$) | ppm/ $^\circ C$ | 50 | | |

²⁾Rated voltage: $\sqrt{P \times R}$

GLOBAL PART NUMBER INFORMATION

New Global Part Numbering: SOMC16011K00GD (preferred part numbering format)

S O M C 1 6 0 1 1 K 0 0 G D C

| GLOBAL MODEL | PIN COUNT | SCHEMATIC | RESISTANCE VALUE | TOLERANCE CODE | PACKAGING | SPECIAL |
|--------------|----------------|--|--|--|--|--|
| SOMC | 14 16 20 | 01 = Bussed 03 = Isolated 00 = Special | R = Decimal K = Thousand M = Million 10R0 = 10 Ω 680K = 680 k Ω 1M00 = 1.0 M Ω | F = $\pm 1\%$ G = $\pm 2\%$ J = $\pm 5\%$ S = Special | EJ = Lead Free, Tube EA = Lead Free, Tape & Reel DC = Tin/Lead, Tube RZ = Tin/Lead, Tape & Reel | Blank = Standard (Dash Number) (up to 3 digits) From 1-999 as applicable |

Historical Part Number example: SOMC1601102G (will continue to be accepted)

SOMC 16 01 102 G D02

New Global Part Numbering: SOMC2005500BGRZ (preferred part numbering format)

S O M C 2 0 0 5 5 0 0 B G R Z


| GLOBAL MODEL | PIN COUNT | SCHEMATIC | RESISTANCE VALUE | TOLERANCE CODE | PACKAGING | SPECIAL |
|--------------|----------------|----------------------|--|---|--|--|
| SOMC | 14 16 20 | 05 = Dual Terminator | 3 digit Impedance code, followed by Alpha modifier (see Impedance table) | F = $\pm 1\%$ G = $\pm 2\%$ J = $\pm 5\%$ | EJ = Lead Free, Tube EA = Lead Free, Tape & Reel DC = Tin/Lead, Tube RZ = Tin/Lead, Tape & Reel | Blank = Standard (Dash Number) (up to 3 digits) From 1-999 as applicable |

Historical Part Number example: SOMC2005820131G (will continue to be accepted)

SOMC 20 05 810 131 G R61

* Pb containing terminations are not RoHS compliant, exemptions may apply

DIMENSIONS

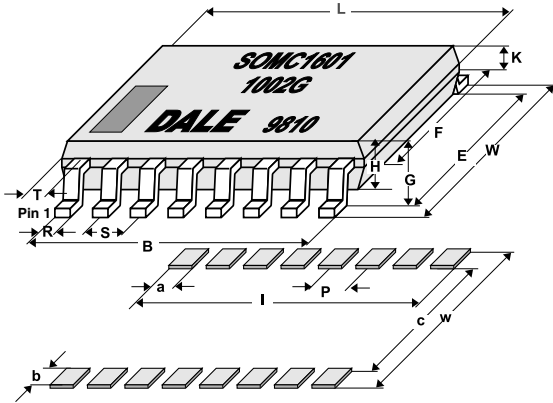


| SOLDER PAD DIMENSIONS in inches [millimeters] | | | | | | |
|---|------|------|------|------|------|------|
| | a | b | c | l | p | w |
| WAVE | 0.64 | 1.91 | 5.34 | 9.53 | 1.27 | 9.15 |
| REFLOW | 0.64 | 1.91 | 5.34 | 9.53 | 1.27 | 9.15 |

The dimension shown are for a 16 pin part. For parts with different pin numbers use the same pitch and add or subtract pads as required.

NOTE: Maximum solder reflow temperature + 255 °C

| DIMENSIONS [in millimeters] | | | | | | | | | | | |
|-----------------------------|--------|--------|--------|--------|--------|--------|--------|-------|-------|------|--------|
| PIN NO# | L | W | B | E | F | G | H | K | R | S | T |
| 14 | 9.91 | 7.62 | 7.62 | 6.20 | 5.59 | 2.16 | 2.03 | 0.914 | 0.457 | 1.27 | 1.14 |
| 16 | 11.18 | 7.62 | 8.89 | 6.20 | 5.59 | 2.16 | 2.03 | 0.914 | 0.457 | 1.27 | 1.14 |
| 20 | 13.72 | 7.62 | 11.43 | 6.20 | 5.59 | 2.16 | 2.03 | 0.914 | 0.457 | 1.27 | 1.14 |
| Tol | ±0.254 | ±0.381 | ±0.254 | ±0.381 | ±0.127 | ±0.127 | ±0.127 | | | | ±0.254 |

CIRCUIT SCHEMATICS

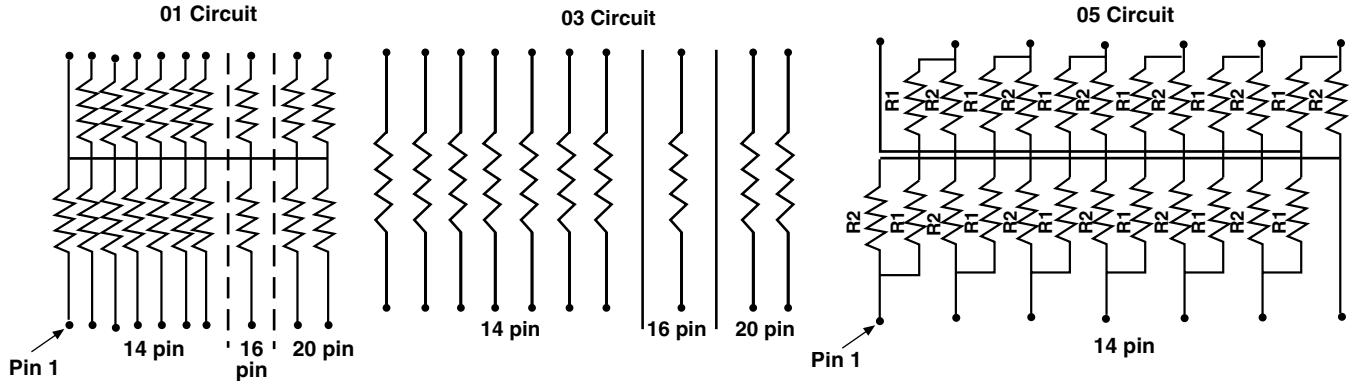

| IMPEDANCE CODES | | | | | |
|-----------------|--------------------|--------------------|------|--------------------|--------------------|
| CODE | R ₁ (Ω) | R ₂ (Ω) | CODE | R ₁ (Ω) | R ₂ (Ω) |
| 500B | 82 | 130 | 141A | 270 | 270 |
| 750B | 120 | 200 | 181A | 330 | 390 |
| 800C | 130 | 210 | 191A | 330 | 470 |
| 990A | 160 | 260 | 221B | 330 | 680 |
| 101C | 180 | 240 | 281B | 560 | 560 |
| 111C | 180 | 270 | 381B | 560 | 1.2K |
| 121B | 180 | 390 | 501C | 620 | 2.7K |
| 121C | 220 | 270 | 102A | 1.5K | 3.3K |
| 131A | 220 | 330 | 202B | 3K | 6.2K |

| PERFORMANCE | | |
|------------------------------|--------------------|--------------|
| TEST | CONDITIONS OF TEST | TEST RESULTS |
| Power Conditioning | MIL STD-202 | ± 0.5% |
| Load Life at 70°C | MIL STD-202 | ± 0.5% |
| Short Time Overload | MIL STD-202 | ± 0.25% |
| Thermal Shock | MIL STD-202 | ± 0.5% |
| Moisure Resistance | MIL STD-202 | ± 0.5% |
| Resistance to Soldering Heat | MIL STD-202 | ± 0.25% |
| Low Temperature Operation | MIL STD-202 | ± 0.25% |
| Vibration | MIL STD-202 | ± 0.25% |
| Shock | MIL STD-202 | ± 0.25% |
| Terminal Strength | MIL STD-202 | ± 0.25% |



Disclaimer

All product specifications and data are subject to change without notice.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

Vishay disclaims any and all liability arising out of the use or application of any product described herein or of any information provided herein to the maximum extent permitted by law. The product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein, which apply to these products.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications unless otherwise expressly indicated. Customers using or selling Vishay products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify Vishay for any damages arising or resulting from such use or sale. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Vishay:

[SOMC1603820RGDC](#) [SOMC16014K75GDC](#) [SOMC14011K00GDC](#) [SOMC14011M00GDC](#) [SOMC2003330RGDC](#)
[SOMC16012K20GDC](#) [SOMC16012K70GDC](#) [SOMC160356K0GRZ](#) [SOMC160382R0GRZ](#) [SOMC160320K0FRZ](#)
[SOMC1401300RGRZ](#) [SOMC16034K70GDC](#) [SOMC1603560RGRZ](#) [SOMC160310K0FRZ](#) [SOMC1603390RGRZ](#)
[SOMC16033K00GRZ](#) [SOMC1601470RGDC](#) [SOMC16018K20GDC](#) [SOMC160315K0FDC](#) [SOMC16034K70GRZ](#)
[SOMC160339R0GRZ](#) [SOMC20014K70GRZ](#) [SOMC1601-100K](#) [SOMC1401100KGDC](#) [SOMC20011K00GDC](#)
[SOMC16033K40FRZ](#) [SOMC160312K0GDC](#) [SOMC14014K70GDC](#) [SOMC1603510RGRZ](#) [SOMC160356R0GRZ](#)
[SOMC1603330RGRZ](#) [SOMC16035K60GDC](#) [SOMC14011K00GRZ](#) [SOMC1403470RGDC](#) [SOMC1603470RGDC](#)
[SOMC1603270KGRZ](#) [SOMC14031K00GDC](#) [SOMC16032K00GDC](#) [SOMC16031M00GDC](#) [SOMC16031K00GDC](#)
[SOMC16037K87FRZ](#) [SOMC1601470KGDC](#) [SOMC160122R0GDC](#) [SOMC16031K00FRZ](#) [SOMC160368K0GRZ](#)
[SOMC1603120RGRZ](#) [SOMC1601390RGDC](#) [SOMC160356K0GDC](#) [SOMC140356K0GDC](#) [SOMC160351R0GDC](#)
[SOMC1603220KGDC](#) [SOMC140110K0GRZ](#) [SOMC1405221/331GTR](#) [SOMC1405271/271GTR](#) [SOMC1601103GTR-](#)
[S399](#) [SOMC1601472GTR-S399](#) [SOMC16031K00GRZ399](#) [SOMC160310K0GRZ](#) [SOMC1603103GTR-S399](#)
[SOMC1603104GTR-S399](#) [SOMC1603120RGDC](#) [SOMC160327K0GDC](#) [SOMC1603473GTR-S399](#)
[SOMC1603680RGDC](#) [SOMC1605221/331G](#) [SOMC160310K0FDC](#) [SOMC1601-330K](#) [SOMC1603220RGEJ](#)
[SOMC1603220RGEA](#) [SOMC1603330RGEJ](#) [SOMC1603330RGEA](#) [SOMC1601-1.5K](#) [SOMC160110K0GEA](#)
[SOMC160110K0GEJ](#) [SOMC160310K0GEJ](#) [SOMC160310K0GEA](#) [SOMC16012K20GEA](#) [SOMC16012K20GEJ](#)
[SOMC160322K0GEA](#) [SOMC160322K0GEJ](#) [SOMC16032K20GEJ](#) [SOMC16032K20GEA](#) [SOMC160333R0GEA](#)
[SOMC160333R0GEJ](#) [SOMC1603-2K](#) [SOMC16034K70GEJ](#) [SOMC16034K70GEA](#) [SOMC16014K70GEA](#)
[SOMC16014K70GEJ](#) [SOMC1601100KGEJ](#) [SOMC1601100KGEA](#) [SOMC1405331/471G](#) [MSP10A012203F](#)
[SOMC160347R0GEJ](#) [SOMC140110K0FRZ](#) [SOMC1401680RGRZ](#) [SOMC20011K00GEA](#) [SOMC20014K70GEA](#)
[SOMC16031M00GRZ](#) [SOMC2005191AGRZ](#)